


# MONO HEAT PUMPS

## TECHNICAL DATA MANUAL



### IMPORTANT NOTE:

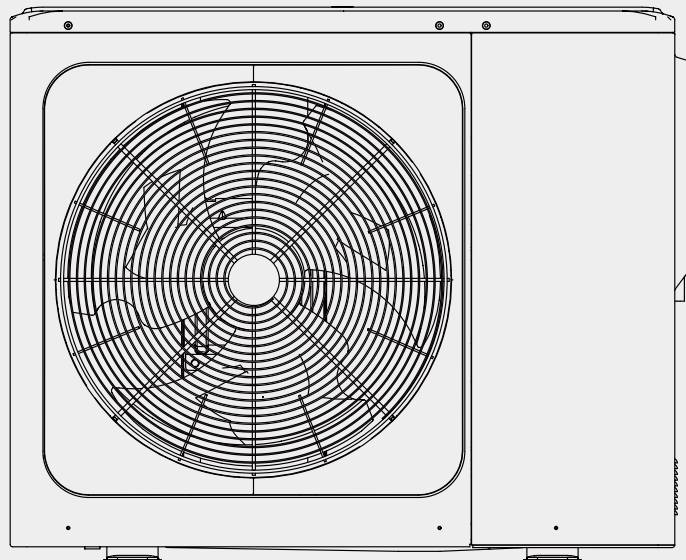

Thank you very much for purchasing our product,  
Before using your unit , please read this manual carefully and keep it for future reference.



# Temperature application

Model	For medium - temperature application										
	Energy efficiency class	Unit sound power	average climate			colder climate			warmer climate		
			Rated heat output	Seasonal space heating energy efficiency	For space heating annual energy consumption	Rated heat output	Seasonal space heating energy efficiency	For space heating annual energy consumption	Rated heat output	Seasonal space heating energy efficiency	For space heating annual energy consumption
	-	dB	kW	%	kWh	kW	%	kWh	kW	%	kWh
NMHPP5RP24	A++	60	6.4	140.7	3655	5.2	113.1	4428	6.2	170.9	1895
NMHPP7RP24	A++	63	7.3	143.6	4088	6.1	117.7	4948	8.1	185.3	2303
NMHPP9RP24	A++	65	8.2	145.5	4539	7.2	122.4	5665	9.0	193.4	2458
NMHPP12RP24	A++	70	12.5	141.6	7148	11.3	126.0	8628	12.0	179.0	3524
NMHPP12RP24P3	A++	70	12.5	141.6	7148	11.3	126.0	8628	12.0	179.0	3523
NMHPP14RP24	A++	72	14.2	141.8	8079	12.5	126.6	9496	14.2	184.6	4040
NMHPP14RP24P3	A++	72	14.2	141.8	8079	12.5	126.6	9496	14.2	184.7	4039
NMHPP16RP24	A++	72	14.7	140.6	8471	13.5	124.3	10473	14.5	184.0	4154
NMHPP16RP24P3	A++	72	14.7	140.7	8470	13.5	124.3	10473	14.5	184.0	4153

Model	For low - temperature application										
	Energy efficiency class	Unit sound power	average climate			colder climate			warmer climate		
			Rated heat output	Seasonal space heating energy efficiency	For space heating annual energy consumption	Rated heat output	Seasonal space heating energy efficiency	For space heating annual energy consumption	Rated heat output	Seasonal space heating energy efficiency	For space heating annual energy consumption
	-	dB	kW	%	kWh	kW	%	kWh	kW	%	kWh
NMHPP5RP24	A+++	60	6.5	201.8	2631	6.1	173.4	3425	6.2	268.2	1229
NMHPP7RP24	A+++	63	7.9	204.0	3155	7.5	174.6	4166	8.1	274.7	1551
NMHPP9RP24	A+++	65	9.1	201.9	3654	8.3	174.6	4591	9.0	279.1	1714
NMHPP12RP24	A+++	70	12.3	200.1	5004	12.5	168.8	7153	12.1	262.3	2437
NMHPP12RP24P3	A+++	70	12.3	200.2	5003	12.5	168.8	7153	12.1	262.5	2435
NMHPP14RP24	A+++	72	14.2	192.5	5984	14.3	171.3	8095	13.2	260.5	2684
NMHPP14RP24P3	A+++	72	14.2	192.5	5984	14.3	171.3	8095	13.2	260.6	2683
NMHPP16RP24	A+++	72	15.2	190.5	6510	15.1	170.9	8546	14.2	255.3	2937
NMHPP16RP24P3	A+++	72	15.2	190.5	6509	15.1	170.9	8546	14.2	255.5	2935

# Product fiche 1

Heat pump space heating		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
Outdoor unit sound power (*)	Average climate low temperature application	dB	60	63	65	70	72
	Average climate medium temperature application	dB	60	63	65	70	72
Space heating	Energy efficiency class 35°C (Low temp. app.)	-	A+++	A+++	A+++	A+++	A+++
Space heating	Energy efficiency class 55°C (Medium temp. app.)	-	A++	A++	A++	A++	A++
Average climate (Design temperature = -10°C)							
Space heating 35°C	Prated (declared heating capacity) @ -10°C	[kW]	6.5	7.9	9.1	12.3	14.2
	Seasonal space heating efficiency (ηs)	[%]	201.8	204.0	201.9	200.1	192.5
	Annual energy consumption	[kWh]	2,631	3,155	3,654	5,004	5,984
Space heating 55°C	Prated (declared heating capacity) @ -10°C	[kW]	6.4	7.3	8.2	12.5	14.2
	Seasonal space heating efficiency (ηs)	[%]	140.7	143.6	145.5	141.6	141.8
	Annual energy consumption	[kWh]	3,655	4,088	4,539	7,148	8,079
Part load conditions space heating average climate low temperature application							
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	5.77	6.99	8.02	10.85	12.52
	COPd (declared COP)	-	3.43	3.29	3.09	3.11	2.97
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	3.74	4.51	5.06	6.79	7.98
	COPd (declared COP)	-	5.04	4.99	4.92	4.86	4.56
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	2.32	2.81	3.22	4.79	5.04
	COPd (declared COP)	-	6.06	6.72	7.03	6.98	7.01
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	1.87	1.87	1.87	3.73	3.73
	COPd (declared COP)	-	9.12	9.12	9.12	9.02	9.02
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00	-10.00
	Pdh (declared heating capacity)	[kW]	6.52	7.46	7.88	12.30	13.41
	COPd (declared COP)	-	3.00	2.87	2.87	2.80	2.66
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65	65

# Product fiche 1

Heat pump space heating		Outdoor	NMHPP16RP24	NMHPP12RP24P3	NMHPP14RP24P3	NMHPP16RP24P3
Outdoor unit sound power (*)	Average climate low temperature application	dB	72	70	72	72
	Average climate medium temperature application	dB	72	70	72	72
Space heating	Energy efficiency class 35°C (Low temp. app.)	-	A+++	A+++	A+++	A+++
Space heating	Energy efficiency class 55°C (Medium temp. app.)	-	A++	A++	A++	A++
Average climate (Design temperature = -10°C)						
Space heating 35°C	Prated (declared heating capacity) @ -10°C	[kW]	15.2	12.3	14.2	15.2
	Seasonal space heating efficiency (ηs)	[%]	190.5	200.2	192.5	190.5
	Annual energy consumption	[kWh]	6,510	5,003	5,984	6,509
Space heating 55°C	Prated (declared heating capacity) @ -10°C	[kW]	14.7	12.5	14.2	14.7
	Seasonal space heating efficiency (ηs)	[%]	140.6	141.6	141.8	140.7
	Annual energy consumption	[kWh]	8,471	7,148	8,079	8,470
Part load conditions space heating average climate low temperature application						
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	13.49	10.85	12.52	13.49
	COPd (declared COP)	-	2.87	3.11	2.97	2.87
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	8.59	6.79	7.98	8.59
	COPd (declared COP)	-	4.53	4.86	4.56	4.53
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	5.55	4.79	5.04	5.55
	COPd (declared COP)	-	7.01	6.98	7.01	7.01
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	3.73	3.73	3.73	3.73
	COPd (declared COP)	-	9.02	9.02	9.02	9.02
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00
	Pdh (declared heating capacity)	[kW]	14.05	12.30	13.41	14.05
	COPd (declared COP)	-	2.65	2.80	2.66	2.65
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65

## Product fiche 2

<b>Heat pump space heating</b>		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
(F) Tbivalent temperature	Tbiv	[°C]	-7.00	-7.00	-7.00	-7.00	-7.00
	Pdh (declared heating capacity)	[kW]	5.77	6.99	8.02	10.85	12.52
	COPd (declared COP)	-	3.43	3.29	3.09	3.11	2.97
Supplementary capacity at P_design	Psup (@Tdesignh: -10°C)	[kW]	0.00	0.44	1.18	0.00	0.75
Part load conditions space heating average climate medium temperature application							
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	5.62	6.42	7.21	11.06	12.52
	COPd (declared COP)	-	2.36	2.31	2.24	2.15	2.20
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	3.52	4.03	4.56	6.91	7.71
	COPd (declared COP)	-	3.70	3.76	3.86	3.59	3.58
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	2.20	2.56	2.84	4.64	5.07
	COPd (declared COP)	-	4.21	4.48	4.58	5.07	5.06
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	1.31	1.31	1.31	2.15	2.15
	COPd (declared COP)	-	4.96	4.96	4.96	4.52	4.52
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00	-10.00
	Pdh (declared heating capacity)	[kW]	6.04	6.85	7.01	10.97	11.51
	COPd (declared COP)	-	2.02	1.98	1.97	1.98	1.96
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	-7.00	-7.00	-7.00	-7.00	-7.00
	Pdh (declared heating capacity)	[kW]	5.62	6.42	7.21	11.06	12.52
	COPd (declared COP)	-	2.36	2.31	2.24	2.15	2.20
Supplementary capacity at P_design	Psup (@Tdesignh: -10°C)	[kW]	0.32	0.40	1.14	1.53	2.65
Colder climate (Design temperature = -22°C)							
Space heating 35°C	Prated (declared heating capacity) @ -22°C	[kW]	6.1	7.5	8.3	12.5	14.3
	Seasonal space heating efficiency (ηs)	[%]	173.4	174.6	174.6	168.8	171.3
	Annual energy consumption	[kWh]	3,425	4,166	4,591	7,153	8,095

## Product fiche 2

Heat pump space heating		Outdoor	NMHP16RP24	NMHP12RP24P3	NMHP14RP24P3	NMHP16RP24P3
(F) Tivalent temperature	Tbiv	[°C]	-7.00	-7.00	-7.00	-7.00
	Pdh (declared heating capacity)	[kW]	13.49	10.85	12.52	13.49
	COPd (declared COP)	-	2.87	3.11	2.97	2.87
Supplementary capacity at P_design	Psup (@Tdesignh: -10°C)	[kW]	1.18	0.00	0.75	1.18
Part load conditions space heating average climate medium temperature application						
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	13.03	11.06	12.52	13.03
	COPd (declared COP)	-	2.16	2.15	2.20	2.16
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	8.50	6.91	7.71	8.50
	COPd (declared COP)	-	3.55	3.59	3.58	3.55
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	5.27	4.64	5.07	5.27
	COPd (declared COP)	-	5.05	5.07	5.06	5.05
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	2.15	2.15	2.15	2.15
	COPd (declared COP)	-	4.52	4.52	4.52	4.52
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00
	Pdh (declared heating capacity)	[kW]	12.07	10.97	11.51	12.07
	COPd (declared COP)	-	1.94	1.98	1.96	1.94
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65
(F) Tivalent temperature	Tbiv	[°C]	-7.00	-7.00	-7.00	-7.00
	Pdh (declared heating capacity)	[kW]	13.03	11.06	12.52	13.03
	COPd (declared COP)	-	2.16	2.15	2.20	2.16
Supplementary capacity at P_design	Psup (@Tdesignh: -10°C)	[kW]	2.63	1.53	2.65	2.63
Colder climate (Design temperature = -22°C)						
Space heating 35°C	Prated (declared heating capacity) @ -22°C	[kW]	15.1	12.5	14.3	15.1
	Seasonal space heating efficiency (ηs)	[%]	170.9	168.8	171.3	170.9
	Annual energy consumption	[kWh]	8,546	7,153	8,095	8,546

## Product fiche 3

Heat pump space heating		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
Space heating 55°C	Prated (declared heating capacity) @ -22°C	[kW]	5.2	6.1	7.2	11.3	12.5
	Seasonal space heating efficiency ( $\eta_s$ )	[%]	113.1	117.7	122.4	126.0	126.6
	Annual energy consumption	[kWh]	4,428	4,948	5,665	8,628	9,496
Part load conditions space heating colder climate low temperature application							
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	4.11	4.42	5.42	8.08	8.74
	COPd (declared COP)	-	3.76	3.67	3.72	3.64	3.59
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	2.38	2.99	3.14	4.93	5.52
	COPd (declared COP)	-	5.33	5.50	5.56	5.34	5.35
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	1.66	2.03	2.16	3.17	3.70
	COPd (declared COP)	-	5.78	6.69	6.55	5.28	7.06
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	1.87	1.87	1.87	3.69	3.69
	COPd (declared COP)	-	9.12	9.12	9.12	9.34	9.34
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00	-22.00
	Pdh (declared heating capacity)	[kW]	4.21	4.78	5.08	8.72	9.14
	COPd (declared COP)	-	2.12	2.16	2.01	2.08	2.02
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	-15.00	-15.00	-15.00	-15.00	-15.00
	Pdh (declared heating capacity)	[kW]	5.00	6.12	6.75	10.17	11.67
	COPd (declared COP)	-	3.02	2.70	2.59	2.66	2.58
Supplementary capacity at P_design	Psup (@Tdesignh: -22°C)	[kW]	1.92	2.72	3.19	3.78	5.17
Part load conditions space heating colder climate medium temperature application							
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	3.21	3.95	4.59	7.09	7.80
	COPd (declared COP)	-	2.60	2.75	2.72	2.75	2.77
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90



## Product fiche 3

Heat pump space heating		Outdoor	NMHPP16RP24	NMHPP12RP24P3	NMHPP14RP24P3	NMHPP16RP24P3
Space heating 55°C	Prated (declared heating capacity) @ -22°C	[kW]	13.5	11.3	12.5	13.5
	Seasonal space heating efficiency ( $\eta_s$ )	[%]	124.3	126.0	126.6	124.3
	Annual energy consumption	[kWh]	10,473	8,628	9,496	10,473
Part load conditions space heating colder climate low temperature application						
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	9.26	8.08	8.74	9.26
	COPd (declared COP)	-	3.59	3.64	3.59	3.59
	Cdh(gradation coefficient)	-	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	5.76	4.93	5.52	5.76
	COPd (declared COP)	-	5.35	5.34	5.35	5.35
	Cdh(gradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	3.76	3.17	3.70	3.76
	COPd (declared COP)	-	7.04	5.28	7.06	7.04
	Cdh(gradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	3.72	3.69	3.69	3.72
	COPd (declared COP)	-	8.78	9.34	9.34	8.78
	Cdh(gradation coefficient)	-	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00
	Pdh (declared heating capacity)	[kW]	9.43	8.72	9.14	9.43
	COPd (declared COP)	-	2.00	2.08	2.02	2.00
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	-15.00	-15.00	-15.00	-15.00
	Pdh (declared heating capacity)	[kW]	12.30	10.17	11.67	12.30
	COPd (declared COP)	-	2.58	2.66	2.58	2.58
Supplementary capacity at P_design	Psup (@Tdesignh: -22°C)	[kW]	5.67	3.78	5.17	5.67
Part load conditions space heating colder climate medium temperature application						
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	8.43	7.09	7.80	8.43
	COPd (declared COP)	-	2.77	2.75	2.77	2.77
	Cdh(gradation coefficient)	-	0.90	0.90	0.90	0.90

## Product fiche 4

Heat pump space heating		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	2.03	2.25	2.82	4.44	4.64
	COPd (declared COP)	-	3.18	3.30	3.60	3.88	3.91
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	1.56	1.56	1.76	3.00	3.00
	COPd (declared COP)	-	4.50	4.50	4.84	4.88	4.88
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	1.44	1.44	1.44	3.60	3.61
	COPd (declared COP)	-	5.83	5.83	5.83	6.61	6.61
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00	-22.00
	Pdh (declared heating capacity)	[kW]	3.24	3.24	3.24	7.00	7.28
	COPd (declared COP)	-	1.32	1.32	1.32	1.38	1.35
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65	65
(F) Tivalent temperature	Tbiv	[°C]	-15.00	-15.00	-15.00	-15.00	-15.00
	Pdh (declared heating capacity)	[kW]	4.25	4.94	5.88	9.21	10.19
	COPd (declared COP)	-	2.00	2.08	2.10	1.92	1.91
Supplementary capacity at P_design	Psup (@Tdesignh: -22°C)	[kW]	1.98	2.82	3.97	4.30	5.21
Warmer climate (Design temperature = 2°C)							
Space heating 35°C	Prated (declared heating capacity) @ 2°C	[kW]	6.2	8.1	9.0	12.1	13.2
	Seasonal space heating efficiency (ηs)	[%]	268.2	274.7	279.1	262.3	260.5
	Annual energy consumption	[kWh]	1,229	1,551	1,714	2,437	2,684
Space heating 55°C	Prated (declared heating capacity) @ 2°C	[kW]	6.2	8.1	9.0	12.0	14.2
	Seasonal space heating efficiency (ηs)	[%]	170.9	185.3	193.4	179.0	184.6
	Annual energy consumption	[kWh]	1,895	2,303	2,458	3,524	4,040
Part load conditions space heating warmer climate low temperature application							
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	5.69	7.23	8.29	12.10	12.94
	COPd (declared COP)	-	4.31	4.04	3.85	3.53	3.51
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	4.01	5.18	5.81	7.78	8.51
	COPd (declared COP)	-	6.39	6.35	6.24	5.82	5.72
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90

## Product fiche 4

Heat pump space heating		Outdoor	NMHPP16RP24	NMHPP12RP24P3	NMHPP14RP24P3	NMHPP16RP24P3
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	5.20	4.44	4.64	5.20
	COPd (declared COP)	-	3.74	3.88	3.91	3.74
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	3.53	3.00	3.00	3.53
	COPd (declared COP)	-	5.19	4.88	4.88	5.19
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	3.61	3.60	3.61	3.61
	COPd (declared COP)	-	6.61	6.61	6.61	6.61
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00
	Pdh (declared heating capacity)	[kW]	7.52	7.00	7.28	7.52
	COPd (declared COP)	-	1.30	1.38	1.35	1.30
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	-15.00	-15.00	-15.00	-15.00
	Pdh (declared heating capacity)	[kW]	11.03	9.21	10.19	11.03
	COPd (declared COP)	-	1.85	1.92	1.91	1.85
Supplementary capacity at P_design	Psup (@Tdesignh: -22°C)	[kW]	6.00	4.30	5.21	6.00
Warmer climate (Design temperature = 2°C)						
Space heating 35°C	Prated (declared heating capacity) @ 2°C	[kW]	14.2	12.1	13.2	14.2
	Seasonal space heating efficiency (ηs)	[%]	255.3	262.5	260.6	255.5
	Annual energy consumption	[kWh]	2,937	2,435	2,683	2,935
Space heating 55°C	Prated (declared heating capacity) @ 2°C	[kW]	14.5	12.0	14.2	14.5
	Seasonal space heating efficiency (ηs)	[%]	184.0	179.0	184.7	184.0
	Annual energy consumption	[kWh]	4,154	3,523	4,039	4,153
Part load conditions space heating warmer climate low temperature application						
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	14.20	12.10	12.94	14.20
	COPd (declared COP)	-	3.22	3.53	3.51	3.22
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	9.15	7.78	8.51	9.15
	COPd (declared COP)	-	5.41	5.82	5.72	5.41
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90

## Product fiche 5

Heat pump space heating		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	2.07	2.46	2.67	3.64	3.96
	COPd (declared COP)	-	8.71	9.30	9.63	8.31	8.51
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	2.00	2.00	2.00	2.00	2.00
	Pdh (declared heating capacity)	[kW]	5.69	7.23	8.29	12.10	12.94
	COPd (declared COP)	-	4.31	4.04	3.85	3.53	3.51
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	7.00	7.00	7.00	7.00	7.00
	Pdh (declared heating capacity)	[kW]	4.01	5.18	5.81	7.78	8.51
	COPd (declared COP)	-	6.39	6.35	6.24	5.82	5.72
Supplementary capacity at P_design	Psup (@Tdesignh: 2°C)	[kW]	0.55	0.84	0.75	0.00	0.26
Part load conditions space heating warmer climate medium temperature application							
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	6.17	7.80	8.42	12.00	13.01
	COPd (declared COP)	-	2.77	2.68	2.68	2.39	2.37
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	3.97	5.22	5.81	7.73	9.12
	COPd (declared COP)	-	3.90	4.07	4.16	3.86	3.95
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	2.06	2.36	2.74	3.59	4.26
	COPd (declared COP)	-	5.28	6.07	6.64	5.88	6.37
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	2.00	2.00	2.00	2.00	2.00
	Pdh (declared heating capacity)	[kW]	6.17	7.80	8.42	12.00	13.01
	COPd (declared COP)	-	2.77	2.68	2.68	2.39	2.37
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	7.00	7.00	7.00	7.00	7.00
	Pdh (declared heating capacity)	[kW]	3.97	5.22	5.81	7.73	9.12
	COPd (declared COP)	-	3.90	4.07	4.16	3.86	3.95
Supplementary capacity at P_design	Psup (@Tdesignh: 2°C)	[kW]	0.00	0.32	0.61	0.00	1.18

## Product fiche 5

Heat pump space heating		Outdoor	NMHP16RP24	NMHP12RP24P3	NMHP14RP24P3	NMHP16RP24P3
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	4.24	3.64	3.96	4.24
	COPd (declared COP)	-	8.56	8.31	8.51	8.56
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	2.00	2.00	2.00	2.00
	Pdh (declared heating capacity)	[kW]	14.20	12.10	12.94	14.20
	COPd (declared COP)	-	3.22	3.53	3.51	3.22
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	7.00	7.00	7.00	7.00
	Pdh (declared heating capacity)	[kW]	9.15	7.78	8.51	9.15
	COPd (declared COP)	-	5.41	5.82	5.72	5.41
Supplementary capacity at P_design	Psup (@Tdesignh: 2°C)	[kW]	0.00	0.00	0.26	0.00
Part load conditions space heating warmer climate medium temperature application						
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	13.62	12.00	13.01	13.62
	COPd (declared COP)	-	2.35	2.39	2.37	2.35
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	9.35	7.73	9.12	9.35
	COPd (declared COP)	-	3.94	3.86	3.95	3.94
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	4.26	3.59	4.26	4.26
	COPd (declared COP)	-	6.37	5.88	6.37	6.37
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	2.00	2.00	2.00	2.00
	Pdh (declared heating capacity)	[kW]	13.62	12.00	13.01	13.62
	COPd (declared COP)	-	2.35	2.39	2.37	2.35
	WTOL (Heating water Operation Limit)	[°C]	65	65	65	65
(F) Tbivalent temperature	Tbiv	[°C]	7.00	7.00	7.00	7.00
	Pdh (declared heating capacity)	[kW]	9.35	7.73	9.12	9.35
	COPd (declared COP)	-	3.94	3.86	3.95	3.94
Supplementary capacity at P_design	Psup (@Tdesignh: 2°C)	[kW]	0.91	0.00	1.18	0.91

## Product fiche 6

Heat pump space heating		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
Product description	Air-to-water heat pump	Y/N	Yes	Yes	Yes	Yes	Yes
	Water-to-water heat pump	Y/N	No	No	No	No	No
	Brine-to-water heat pump	Y/N	No	No	No	No	No
	Low-temperature heat pump	Y/N	No	No	No	No	No
	Equipped with a supplementary heater	Y/N	Yes	Yes	Yes	Yes	Yes
	Heat pump combination heater	Y/N	Yes	Yes	Yes	Yes	Yes
Air to water unit	Rated airflow (outdoor)	[m <sup>3</sup> /h]	3900	4500	4500	5200	5200
Brine/water to water unit	Rated water/brine flow (outdoor H/E)	-	/	/	/	/	/
Other	Capacity control	-	Inverter	Inverter	Inverter	Inverter	Inverter
	Poff (Power consumption Off mode)	[kW]	0.013	0.013	0.013	0.013	0.013
	Pto (Power consumption Thermostat off mode)	[kW]	0.020	0.020	0.020	0.020	0.020
	Psb (Power consumption Standby mode)	[kW]	0.013	0.013	0.013	0.013	0.013
	Pck (Power crankcase heater model)	[kW]	0.000	0.000	0.000	0.000	0.000
	Qelec (Daily electricity consumption)	[kWh]	/	/	/	/	/
	Qfuel (Daily fuel consumption)	[kWh]	/	/	/	/	/

**Note :**

Product fiche data according to energy label directive 2010/30/EC regulation (EU) 811/2013.

Sound power measured according to the EN12102 under conditions of the EN14825.

Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

## Product fiche 6

Heat pump space heating		Outdoor	NMHPP16RP24	NMHPP12RP24P3	NMHPP14RP24P3	NMHPP16RP24P3
Product description	Air-to-water heat pump	Y/N	Yes	Yes	Yes	Yes
	Water-to-water heat pump	Y/N	No	No	No	No
	Brine-to-water heat pump	Y/N	No	No	No	No
	Low-temperature heat pump	Y/N	No	No	No	No
	Equipped with a supplementary heater	Y/N	Yes	Yes	Yes	Yes
	Heat pump combination heater	Y/N	Yes	Yes	Yes	Yes
Air to water unit	Rated airflow (outdoor)	[m <sup>3</sup> /h]	5200	5200	5200	5200
Brine/water to water unit	Rated water/brine flow (outdoor H/E)	-	/	/	/	/
Other	Capacity control	-	Inverter	Inverter	Inverter	Inverter
	Poff (Power consumption Off mode)	[kW]	0.013	0.006	0.006	0.006
	Pto (Power consumption Thermostat off mode)	[kW]	0.020	0.018	0.018	0.018
	Psb (Power consumption Standby mode)	[kW]	0.013	0.006	0.006	0.006
	Pck (Power crankcase heater model)	[kW]	0.000	0.000	0.000	0.000
	Qelec (Daily electricity consumption)	[kWh]	/	/	/	/
	Qfuel (Daily fuel consumption)	[kWh]	/	/	/	/

Note :

a) represents the hydraulic module series ;

b) represents the m-thermal tank series ;

Product fiche data according to energy label directive 2010/30/EC regulation (EU) 811/2013.

Sound power measured according to the EN12102 under conditions of the EN14825.

Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

## Product fiche 7

<b>Heat pump space cooling</b>		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
Outdoor unit sound power (*)	Average climate low temperature application	dB	62	64	66	69	71
	Average climate medium temperature application	dB	62	64	66	69	71
Space cooling 7°C	Prated (declared cooling capacity) @ 35°C	[kW]	5.6	7.4	9.0	11.7	13.5
	Seasonal space cooling efficiency ( $\eta_s$ )	[%]	200.43	204.71	200.21	199.92	200.65
	Annual energy consumption	[kWh]	658	854	1,063	1,380	1,592
Space cooling 18°C	Prated (declared cooling capacity) @ 35°C	[kW]	6.9	8.6	10.2	12.1	14.0
	Seasonal space cooling efficiency ( $\eta_s$ )	[%]	309.5	320.48	329.48	308.53	300.52
	Annual energy consumption	[kWh]	527	635	739	932	1,109
Part load conditions space cooling : low temperature application@7°C							
(A) condition (35°C)	Pdc (declared cooling capacity)	[kW]	5.58	7.39	9.00	11.67	13.51
	EERd (declared EER)	-	3.38	3.28	2.92	3.11	3.01
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(B) condition (30°C)	Pdc (declared cooling capacity)	[kW]	4.27	5.63	6.91	8.84	10.06
	EERd (declared EER)	-	4.52	4.54	4.08	4.14	4.17
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (25°C)	Pdc (declared cooling capacity)	[kW]	2.90	3.60	4.58	5.64	6.49
	EERd (declared EER)	-	5.46	5.87	5.95	5.71	5.64
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (20°C)	Pdc (declared cooling capacity)	[kW]	1.33	1.74	2.07	2.75	3.06
	EERd (declared EER)	-	6.91	6.51	6.74	6.76	6.95
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90



## Product fiche 7

<b>Heat pump space cooling</b>		Outdoor	NMHPP16RP24	NMHPP12RP24P3	NMHPP14RP24P3	NMHPP16RP24P3
Outdoor unit sound power (*)	Average climate low temperature application	dB	71	69	71	71
	Average climate medium temperature application	dB	71	69	71	71
Space cooling 7°C	Prated (declared cooling capacity) @ 35°C	[kW]	14.2	11.7	13.5	14.2
	Seasonal space cooling efficiency (ηs)	[%]	201.37	201.25	201.81	202.48
	Annual energy consumption	[kWh]	1,670	1,371	1,583	1,661
Space cooling 18°C	Prated (declared cooling capacity) @ 35°C	[kW]	15.3	12.1	14.0	15.3
	Seasonal space cooling efficiency (ηs)	[%]	296.54	311.56	303	298.74
	Annual energy consumption	[kWh]	1,229	923	1,100	1,220
<b>Part load conditions space cooling : low temperature application@7°C</b>						
(A) condition (35°C)	Pdc (declared cooling capacity)	[kW]	14.22	11.67	13.51	14.22
	EERd (declared EER)	-	2.96	3.11	3.01	2.96
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
(B) condition (30°C)	Pdc (declared cooling capacity)	[kW]	10.62	8.84	10.06	10.62
	EERd (declared EER)	-	4.16	4.14	4.17	4.16
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (25°C)	Pdc (declared cooling capacity)	[kW]	7.11	5.64	6.49	7.11
	EERd (declared EER)	-	5.72	5.71	5.64	5.72
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (20°C)	Pdc (declared cooling capacity)	[kW]	3.06	2.75	3.06	3.06
	EERd (declared EER)	-	6.95	6.76	6.95	6.95
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90

## Product fiche 8

Heat pump space cooling		Outdoor	NMHPP5RP24	NMHPP7RP24	NMHPP9RP24	NMHPP12RP24	NMHPP14RP24
Part load conditions space cooling : medium temperature application@18°C							
(A) condition (35°C)	Pdc (declared cooling capacity)	[kW]	6.86	8.55	10.24	12.10	14.03
	EERd (declared EER)	-	5.29	4.99	4.42	4.77	4.55
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(B) condition (30°C)	Pdc (declared cooling capacity)	[kW]	5.27	6.66	7.81	9.24	10.60
	EERd (declared EER)	-	7.03	6.56	6.34	6.67	6.43
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (25°C)	Pdc (declared cooling capacity)	[kW]	3.32	4.51	5.16	5.83	7.08
	EERd (declared EER)	-	8.14	9.48	9.50	9.38	8.93
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (20°C)	Pdc (declared cooling capacity)	[kW]	1.61	1.96	2.51	3.86	3.89
	EERd (declared EER)	-	11.31	11.08	13.78	9.38	9.38
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
Air to water unit	Rated airflow (outdoor)	[m <sup>3</sup> /h]	3900	4500	4500	5200	5200
Brine/water to water unit	Rated water/brine flow (outdoor H/E)	-	/	/	/	/	/
Other	Capacity control	-	Inverter	Inverter	Inverter	Inverter	Inverter
	Poff (Power consumption Off mode)	[kW]	0.013	0.013	0.013	0.013	0.013
	Pto (Power consumption Thermostat off mode)	[kW]	0.005	0.005	0.005	0.005	0.005
	Psb (Power consumption Standby mode)	[kW]	0.013	0.013	0.013	0.013	0.013
	Pck (Power crankcase heater mode)	[kW]	0.000	0.000	0.000	0.000	0.000
	Qelec (Daily electricity consumption)	[kWh]	/	/	/	/	/
	Qfuel (Daily fuel consumption)	[kWh]	/	/	/	/	/

## Product fiche 8

Heat pump space cooling		Outdoor	NMHPP16RP24	NMHPP12RP24P3	NMHPP14RP24P3	NMHPP16RP24P3
Part load conditions space cooling : medium temperature application@18°C						
(A) condition (35°C)	Pdc (declared cooling capacity)	[kW]	15.34	12.10	14.03	15.34
	EERd (declared EER)	-	4.33	4.77	4.55	4.33
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
(B) condition (30°C)	Pdc (declared cooling capacity)	[kW]	11.44	9.24	10.60	11.44
	EERd (declared EER)	-	6.14	6.67	6.43	6.14
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
(C) condition (25°C)	Pdc (declared cooling capacity)	[kW]	7.93	5.83	7.08	7.93
	EERd (declared EER)	-	8.95	9.38	8.93	8.95
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
(D) condition (20°C)	Pdc (declared cooling capacity)	[kW]	3.89	3.86	3.89	3.89
	EERd (declared EER)	-	9.38	9.38	9.38	9.38
	Cdc(degradation coefficient)	-	0.90	0.90	0.90	0.90
Air to water unit	Rated airflow (outdoor)	[m <sup>3</sup> /h]	5200	5200	5200	5200
Brine/water to water unit	Rated water/brine flow (outdoor H/E)	-	/	/	/	/
Other	Capacity control	-	Inverter	Inverter	Inverter	Inverter
	Poff (Power consumption Off mode)	[kW]	0.013	0.006	0.006	0.006
	Pto (Power consumption Thermostat off mode)	[kW]	0.005	0.006	0.006	0.006
	Psb (Power consumption Standby mode)	[kW]	0.013	0.006	0.006	0.006
	Pck (Power crankcase heater mode)	[kW]	0.000	0.000	0.000	0.000
	Qelec (Daily electricity consumption)	[kWh]	/	/	/	/
	Qfuel (Daily fuel consumption)	[kWh]	/	/	/	/

## Product fiche 8

Outdoor unit	Ambient Temperature: 35/24 Water temperature: 23/18			Ambient Temperature: 35/24 Water temperature: 12/7			Ambient Temperature: 7/6 Water temperature: 30/35			Ambient Temperature: 2/1 Water temperature: 30/35		
	Capacity kW	Power input kW	EER	Capacity kW	Power input kW	EER	Capacity kW	Power input kW	COP	Capacity kW	Power input kW	COP
NMHPP5RP24	6.50	1.275	5.10	5.50	1.692	3.25	6.50	1.226	5.30	5.60	1.333	4.20
NMHPP7RP24	8.30	1.711	4.85	7.40	2.349	3.15	8.40	1.663	5.05	7.10	1.797	3.95
NMHPP9RP24	10.00	2.326	4.30	9.00	3.103	2.90	10.00	2.128	4.70	8.20	2.158	3.80
NMHPP12RP24	12.20	2.652	4.60	11.60	3.742	3.10	12.20	2.490	4.90	12.30	3.417	3.60
NMHPP12RP24P3	12.20	2.652	4.60	11.60	3.742	3.10	12.20	2.490	4.90	12.30	3.417	3.60
NMHPP14RP24	13.90	3.159	4.40	13.40	4.573	2.93	14.10	3.000	4.70	13.00	3.714	3.50
NMHPP14RP24P3	13.90	3.159	4.40	13.40	4.573	2.93	14.10	3.000	4.70	13.00	3.714	3.50
NMHPP16RP24	15.40	3.667	4.20	14.00	4.828	2.90	16.00	3.556	4.50	14.50	4.462	3.25
NMHPP16RP24P3	15.40	3.667	4.20	14.00	4.828	2.90	16.00	3.556	4.50	14.50	4.462	3.25

Outdoor unit	Ambient Temperature: -7/-8 Water temperature: 30/35			Ambient Temperature: 7/6 Water temperature: 40/45			Ambient Temperature: 2/1 Water temperature: 40/45			Ambient Temperature: -7/-8 Water temperature: 40/45		
	Capacity kW	Power input kW	COP	Capacity kW	Power input kW	COP	Capacity kW	Power input kW	COP	Capacity kW	Power input kW	COP
NMHPP5RP24	6.20	1.938	3.20	6.60	1.650	4.00	6.50	2.063	3.15	6.10	2.346	2.60
NMHPP7RP24	7.10	2.254	3.15	8.50	2.237	3.80	7.50	2.459	3.05	6.80	2.720	2.50
NMHPP9RP24	8.00	2.667	3.00	10.20	2.795	3.65	8.50	2.881	2.95	7.40	3.083	2.40
NMHPP12RP24	11.60	4.070	2.85	12.50	3.378	3.70	12.00	4.138	2.90	11.50	4.792	2.40
NMHPP12RP24P3	11.60	4.070	2.85	12.50	3.378	3.70	12.00	4.138	2.90	11.50	4.792	2.40
NMHPP14RP24	12.50	4.464	2.80	14.50	4.085	3.55	13.00	4.643	2.80	12.50	5.435	2.30
NMHPP14RP24P3	12.50	4.464	2.80	14.50	4.085	3.55	13.00	4.643	2.80	12.50	5.435	2.30
NMHPP16RP24	13.50	5.000	2.70	16.20	4.696	3.45	14.30	5.296	2.70	13.50	6.000	2.25
NMHPP16RP24P3	13.50	5.000	2.70	16.20	4.696	3.45	14.30	5.296	2.70	13.50	6.000	2.25

Outdoor unit	Ambient Temperature: 7/6 Water temperature: 47/55			Ambient Temperature: 2/1 Water temperature: 47/55			Ambient Temperature: -7/-8 Water temperature: 47/55		
	Capacity kW	Power input kW	COP	Capacity kW	Power input kW	COP	Capacity kW	Power input kW	COP
NMHPP5RP24	6.30	1.969	3.20	6.30	2.250	2.80	5.70	2.651	2.15
NMHPP7RP24	8.20	2.603	3.15	7.60	2.815	2.70	6.60	3.143	2.10
NMHPP9RP24	9.40	3.032	3.10	8.40	3.170	2.65	7.20	3.512	2.05
NMHPP12RP24	12.00	4.000	3.00	12.00	5.106	2.35	10.80	5.143	2.10
NMHPP12RP24P3	12.00	4.000	3.00	12.00	5.106	2.35	10.80	5.143	2.10
NMHPP14RP24	14.00	4.746	2.95	13.00	5.603	2.32	11.70	5.625	2.08
NMHPP14RP24P3	14.00	4.746	2.95	13.00	5.603	2.32	11.70	5.625	2.08
NMHPP16RP24	16.00	5.614	2.85	13.50	5.870	2.30	12.80	6.244	2.05
NMHPP16RP24P3	16.00	5.614	2.85	13.50	5.870	2.30	12.80	6.244	2.05

# ErP Information

Fan Types	Axial fan		
Directive (or Standard) for Regulation	ErP Directive 2009/125/EC COMMISSION REGULATION (EU) No 327/2011		
Model Name	ZKSN-170-8-3L	Rev.	
Prepare by			

## Specified Information of Fan:

No.	Information Item	Comment
1	$\eta_{\text{target}} =$	28.6%
2	Overall efficiency ( $\eta_e$ ) =	34.0%
3	Pass or not (Criteria: $\eta_e \geq \eta_{\text{target}}$ )	Pass
4	Measurement category (A-D)	A
5	Efficiency category (static or total)	Static
6	Efficiency grade at optimum energy efficiency point	N =45.4
7	VSD is integrated within the fan	YES
8	Year of Manufacture	Ref. to the Unit Nameplate
9	Manufacturer's name and place of manufacture	Ref. to the Unit Nameplate
10.1	Rated motor power input(s) (kW), at optimum energy efficiency	0.156kw
10.2	Rated motor flow rate(s) at optimum energy efficiency	1.290m <sup>3</sup> /s
10.3	Rated motor pressure(s) at optimum energy efficiency	36Pa
11	Rotations per minute (R.P.M)at the optimum energy efficiency point	750r/min
12	Specific ratio	1.001
13	Information relevant for facilitating disassembly, recycling or disposal at end-of-life	all materials can be recycled
14	Information relevant to minimize impact on the environment and ensure optimal life expectancy as regards installation, use and maintenance of the fan	For installation, the clearance of 500 mm shall be kept from inlet
15	Description of additional items used when determining the fan energy efficiency, such as ducts, that are not described in the measurement category and not supplied with the fan.	Measurement category A, fan is free inlet and outlet conditions
16	Motor manufacturer	SHISHISHI TONGDA MOTOR CO.,LTD.

# ErP Information

Fan Types	Axial fan		
Directive (or Standard) for Regulation	ErP Directive 2009/125/EC COMMISSION REGULATION (EU) No 327/2011		
Model Name	ZKSN-170-8-3L	Rev.	
Prepare by			

Specified Information of Fan:

No.	Information Item	Comment
1	$\eta_{\text{target}} =$	28.5%
2	Overall efficiency ( $\eta_e$ ) =	33.9%
3	Pass or not (Criteria: $\eta_e \geq \eta_{\text{target}}$ )	Pass
4	Measurement category (A-D)	A
5	Efficiency category (static or total)	Static
6	Efficiency grade at optimum energy efficiency point	N =45.4
7	VSD is integrated within the fan	YES
8	Year of Manufacture	Ref. to the Unit Nameplate
9	Manufacturer's name and place of manufacture	Ref. to the Unit Nameplate
10.1	Rated motor power input(s) (kW), at optimum energy efficiency	0.153kw
10.2	Rated motor flow rate(s) at optimum energy efficiency	1.248m <sup>3</sup> /s
10.3	Rated motor pressure(s) at optimum energy efficiency	36Pa
11	Rotations per minute (R.P.M)at the optimum energy efficiency point	750r/min
12	Specific ratio	1.001
13	Information relevant for facilitating disassembly, recycling or disposal at end-of-life	all materials can be recycled
14	Information relevant to minimize impact on the environment and ensure optimal life expectancy as regards installation, use and maintenance of the fan	For installation, the clearance of 500 mm shall be kept from inlet
15	Description of additional items used when determining the fan energy efficiency, such as ducts, that are not described in the measurement category and not supplied with the fan.	Measurement category A, fan is free inlet and outlet conditions
16	Motor manufacturer	GUANGDONG WELLING MOTOR MANUFACTURING CO.,LTD.

# ErP Information

Fan Types	Axial fan		
Directive (or Standard) for Regulation	ErP Directive 2009/125/EC COMMISSION REGULATION (EU) No 327/2011		
Model Name	ZKSN-200-10-2L	Rev.	
Prepare by			

## Specified Information of Fan:

No.	Information Item	Comment
1	$\eta_{\text{target}} =$	29.1%
2	Overall efficiency ( $\eta_e$ ) =	33.6%
3	Pass or not (Criteria: $\eta_e \geq \eta_{\text{target}}$ )	Pass
4	Measurement category (A-D)	A
5	Efficiency category (static or total)	Static
6	Efficiency grade at optimum energy efficiency point	N =44.6
7	VSD is integrated within the fan	YES
8	Year of Manufacture	Ref. to the Unit Nameplate
9	Manufacturer's name and place of manufacture	Ref. to the Unit Nameplate
10.1	Rated motor power input(s) (kW), at optimum energy efficiency	0.186kw
10.2	Rated motor flow rate(s) at optimum energy efficiency	1.292m <sup>3</sup> /s
10.3	Rated motor pressure(s) at optimum energy efficiency	43Pa
11	Rotations per minute (R.P.M)at the optimum energy efficiency point	800r/min
12	Specific ratio	1.001
13	Information relevant for facilitating disassembly, recycling or disposal at end-of-life	all materials can be recycled
14	Information relevant to minimize impact on the environment and ensure optimal life expectancy as regards installation, use and maintenance of the fan	For installation, the clearance of 500 mm shall be kept from inlet
15	Description of additional items used when determining the fan energy efficiency, such as ducts, that are not described in the measurement category and not supplied with the fan.	Measurement category A, fan is free inlet and outlet conditions
16	Motor manufacturer	GUANGDONG WELLING MOTOR MANUFACTURING CO.,LTD.



# ErP Information

Fan Types	Axial fan		
Directive (or Standard) for Regulation	ErP Directive 2009/125/EC COMMISSION REGULATION (EU) No 327/2011		
Model Name	ZKSN-200-10-2L	Rev.	
Prepare by			

## Specified Information of Fan:

No.	Information Item	Comment
1	$\eta_{\text{target}} =$	28.9%
2	Overall efficiency ( $\eta_e$ ) =	33.0%
3	Pass or not (Criteria: $\eta_e \geq \eta_{\text{target}}$ )	Pass
4	Measurement category (A-D)	A
5	Efficiency category (static or total)	Static
6	Efficiency grade at optimum energy efficiency point	N =44.1
7	VSD is integrated within the fan	YES
8	Year of Manufacture	Ref. to the Unit Nameplate
9	Manufacturer's name and place of manufacture	Ref. to the Unit Nameplate
10.1	Rated motor power input(s) (kW), at optimum energy efficiency	0.178kw
10.2	Rated motor flow rate(s) at optimum energy efficiency	1.420m <sup>3</sup> /s
10.3	Rated motor pressure(s) at optimum energy efficiency	36Pa
11	Rotations per minute (R.P.M)at the optimum energy efficiency point	800r/min
12	Specific ratio	1.001
13	Information relevant for facilitating disassembly, recycling or disposal at end-of-life	all materials can be recycled
14	Information relevant to minimize impact on the environment and ensure optimal life expectancy as regards installation, use and maintenance of the fan	For installation, the clearance of 500 mm shall be kept from inlet
15	Description of additional items used when determining the fan energy efficiency,such as ducts, that are not described in the measurement category and not supplied with the fan.	Measurement category A, fan is free inlet and outlet conditions
16	Motor manufacturer	JIANGSU SHANGQI GROUP CO., LTD.



# NOTES

---

A series of horizontal dotted lines for writing notes.

16125300002840 V.C